



VTS

Lightweight and robust trilaminate dry suit

Lightweight and easy to store robust diving suit with footwear attachments .

- **Advanced defenses:** The VIKING™ VTS diving suit blends nylon and butyl rubber materials, providing lightweight puncture and abrasion resistance
- **Enhanced features:** This protective suit leverages Vulca-Seam Technology, which ensures watertight seams, and is easy to transport as it is lightweight and easy to store
- **Heightened grip:** In addition, the VIKING™ VTS diving suit comes with rubber-coated, 5mm neoprene boots, which are durable, waterproof and have good traction to prevent slips



Industries

- Commercial Diving


Applications

- Special Forces Diving
- Technical Diving
- Underwater Search and Rescue
- Inshore Diving

KEY FEATURES & BENEFITS

- ◊ **Nylon and butyl rubber material:** Good abrasion resistance
- ◊ **Vulca-Seam Technology:** Watertight seams assured
- ◊ **Rubber-coated, 5mm neoprene boots:** For added personal protection

Seam Diagram

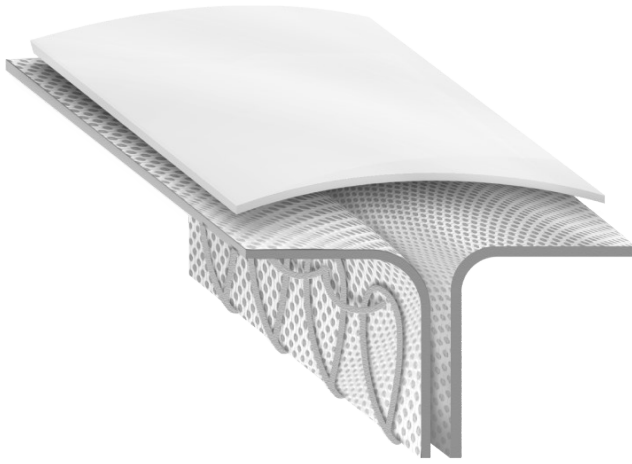

Performance Standards



EN 14225-2:2017

Product Information

Product Information	
Color	Black
Product Material	255 g/m2 Nylon outer / Butyl rubber / Nylon inner material
Product Reference	VT5
Reinforcements	The VIKING™ VT5 material is inherently abrasion and puncture resistant. Soft, flexible and hard-wearing knee pads are fitted as standard.
Seam Type	Stitched and Taped
Available Sizes	S, M, L, XL, 2XL
Standards Overview	EN 14225-2:2017

Suit Components & Accessories

Suit Components and Accessories	
Design Features	• Front entry with adjustable torso (external crotch strap) • Rear entry with non-adjustable torso
Neck Seal	Fitted with a Surveyor latex neck seal as standard. Option: VIKING™ Quick Neck system, which allows for quick changing of broken seals. Neoprene neck warmer in combination with latex neck seal.
Cuffs	Latex conical cuffs are the standard fitment. Options: A rubber cuff ring system or the VIKING™ Bayonet Ring System.
Footwear And Attachments	Rubber coated 5 mm neoprene boots. The boots feature a non-slip outsole and a heel fin retainer. Alternative options are available.
Zipper	Front entry: Medium Duty (MD) non-magnetic; 85 or 90 cm long; placed diagonally across the upper body. Rear entry: Medium Duty (MD) non-magnetic; 90 cm long; placed across the shoulders. The zipper is covered by a flap.
Included With Each Delivery	Each suit comes supplied with suspenders, carry bag, user manual, repair kit and zip care materials.

For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region
Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00

Asia Pacific Region
Ansell Global Trading Center
T: +603 8310 6688

North America Region
Ansell Healthcare Products LLC
T: +1 800 800 0444

Latin America & Caribbean Region
Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Australia
Ansell Limited
T: +61 1800 337 041

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

