


Extra-long disposable gloves for superior product and worker protection

- **Extended chemical protection:** MICROFLEX™ 93-243 gloves feature an extra-long cuff to shield more of your arm and provide excellent chemical splash protection — ideal for laboratory and pharmaceutical manufacturing, as well as food processing workers
- **Reduced allergy risk:** Manufactured without accelerators, helping to protect users from Type IV skin allergies
- **Ultra-long cuff design:** MICROFLEX™ 93-243 gloves feature an elbow-length cuff designed to prevent roll-down and minimize the risk of cross-contamination
- **Secure grip:** The textured palm and fingers of these gloves results in a more confident, secure grip of instruments and glassware
- **Product protection:** To prevent contamination and protect product integrity, these gloves are packed in polybags

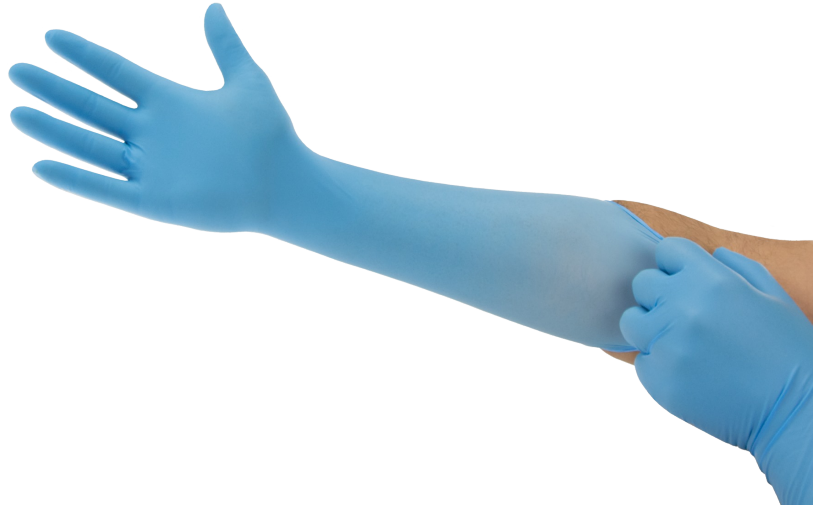

Industries

- Food Processing
- Life Sciences

Recommended For

- Enhanced tactile sensitivity and dexterity, especially for delicate procedures

TECHNICAL DATA SHEET

	Product Information
Material	Nitrile
External Glove Surface	Fully Textured
Audit Standards	ISO 9001
Product Certification	Personal Protective Equipment Regulation (EU) 2016/425 Category III risks, CE 0493, EN 16523-1, EN ISO 374-1:2016 Type B KPT, EN ISO 374-5:2016 Virus, EN ISO 21420:2020, EU Food Contact Approved, ISO 9001, UKCA, EN 1149-5
Packaging Overview	100 gloves per polybag 10 polybags per case 1000 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Malaysia
Product Segmentation	High Risk
Antistatic	Yes EN1149
Silicone Free	Yes
Vulcanization Chemical Accelerators	<ul style="list-style-type: none"> Made without accelerators <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	390 / 15.4		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.13 / 5.1		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.17 / 6.7		ASTM D3767,EN 420
	BEFORE AGING	AFTER AGING	
Ultimate Tensile Strength (MPa)	≥ 14	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	≥ 6	≥ 6	

ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	93243060	93243070	93243080	93243090	93243100	93243110

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region
Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region
MY: +603 8310 6688
apac.medical@ansell.com
CN: +86 21 38275000
infochina@ansell.com
JP: +813 5549 8151
info.medical.jp@ansell.com

North America Region
Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region
BR: +55 (11) 3356-3100
latam.medical@ansell.com
MX: +52 442 296 2050
latam.medical@ansell.com
CO: +57 1 288 3247
latam.medical@ansell.com

Australia
Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia
Ansell PYC
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

