


Extra-long disposable gloves for superior product and worker protection

- **Extended chemical protection:** MICROFLEX™ 93-243 gloves feature an extra-long cuff to shield more of your arm and provide excellent chemical splash protection — ideal for laboratory and pharmaceutical manufacturing, as well as food processing workers
- **Reduced allergy risk:** Manufactured without accelerators, helping to protect users from Type IV skin allergies
- **Ultra-long cuff design:** MICROFLEX™ 93-243 gloves feature an elbow-length cuff designed to prevent roll-down and minimize the risk of cross-contamination
- **Secure grip:** The textured palm and fingers of these gloves results in a more confident, secure grip of instruments and glassware
- **Product protection:** To prevent contamination and protect product integrity, these gloves are packed in polybags

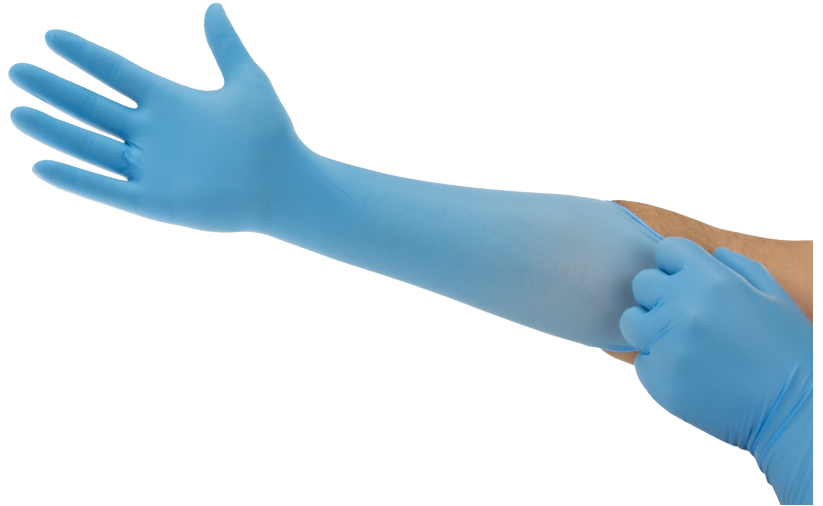

Industries

- Food Processing
- Life Sciences

Recommended For

- Enhanced tactile sensitivity and dexterity, especially for delicate procedures

TECHNICAL DATA SHEET

| Product Information | |
|--|--|
| Material | Nitrile |
| External Glove Surface | Fully Textured |
| Audit Standards | ISO 9001 |
| Product Certification | Personal Protective Equipment Regulation (EU) 2016/425 Category III risks, CE 0493, EN 16523-1, EN ISO 374-1:2016 Type B KPT, EN ISO 374-5:2016 Virus, EN ISO 21420:2020, EU Food Contact Approved, ISO 9001, UKCA, EN 1149-5 |
| Packaging Overview | 100 gloves per polybag 10 polybags per case 1000 gloves per case |
| Storage Instructions | Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition. |
| Country Of Origin | Malaysia |
| Product Segmentation | High Risk |
| Antistatic | Yes EN1149 |
| Silicone Free | Yes |
| Vulcanization Chemical Accelerators | <ul style="list-style-type: none"> Made without accelerators <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p> |

PHYSICAL PROPERTIES

| | Typical Values | | Testing Method |
|---|----------------|-------------|---------------------|
| | BEFORE AGING | AFTER AGING | |
| Length (mm/inches) | 390 / 15.4 | | ASTM D3767,EN 420 |
| Freedom from Holes (Inspection level I) | 1.5 AQL | | ASTM D5151,EN 455-1 |
| Palm Thickness (mm/mils) | 0.13/5.1 | | ASTM D3767,EN 420 |
| Finger Thickness (mm/mils) | 0.17/6.7 | | ASTM D3767,EN 420 |
| Elongation at Break (%) | ≥ 500 | ≥ 400 | ASTM D412 |
| Force at break (N) | ≥ 6 | ≥ 6 | |

ORDERING INFORMATION

| Size | XS (5.5 - 6) | S (6.5 - 7) | M (7.5 - 8) | L (8.5 - 9) | XL (9.5 - 10) | XXL (10.5 - 11) |
|--------------|--------------|-------------|-------------|-------------|---------------|-----------------|
| Product Code | 93243060 | 93243070 | 93243080 | 93243090 | 93243100 | 93243110 |

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
 T: +32 (0) 2 528 74 00
 F: +32 (0) 2 528 74 01

Asia Pacific Region

MY: +603 8310 6688
 apac.medical@ansell.com
 CN: +86 21 38275000
 infochina@ansell.com
 JP: +813 5549 8151
 info.medical.jp@ansell.com

North America Region

Ansell Healthcare Products LLC
 T: +1 800 800 0444
 F: +1 800 800 0445

Latin America & Caribbean Region

BR: +55 (11) 3356-3100
 latam.medical@ansell.com
 MX: +52 442 296 2050
 latam.medical@ansell.com
 CO: +57 1 288 3247
 latam.medical@ansell.com

Australia

Ansell Limited
 T: +61 1800 337 041
 F: +61 1800 803 578

Russia

Ansell PYC
 Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending;
www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of
 merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of
 an end user's selection of gloves for a specific application.

