

Heavy-duty, Hazmat dry rubber diving suit offering contaminated water protection.

- **Improved durability:** The VIKING™ HD is designed to be the ideal dry rubber diving suit for the harshest of environments, thanks to its blend of natural and synthetic rubbers on a 2-way stretch knitted polyester lining
- **Enhanced features:** This dry suit diving features external vulcanized seams for added personal protection
- **Specialized protection:** As this protective suit meets the standards for protection against chemicals and infective agents, it is approved for HZ chemical and BIO micro-organism



Industries

- Commercial Diving
- Emergency Medical Services


Applications

- Underwater Inspection
- Special Forces Diving
- Underwater Search and Recovery
- Navy Diving
- Inspection Diving

KEY FEATURES & BENEFITS

- ◊ **Heavy-duty material:** Designed for the toughest diving environments
- ◊ **External vulcanized seams:** Excellent personal protection
- ◊ **Hazmat and BIO approval:** Protects from chemicals and infective agents

Seam Diagram

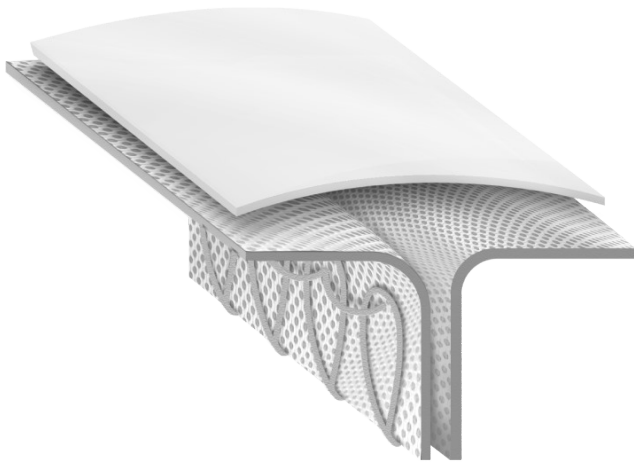

Performance Standards



EN 14225-2:2017 HZ Chemical Resistance

0598

Product Information

Product Information	
Color	Black, Red
Product Material	Blend of natural and synthetic rubbers (NR/EPDM) on a 2-way stretch knitted polyester lining
Product Reference	HD
Reinforcements	Additional layers of anti-slip textured rubber are applied to areas at risk of wear. The shoulders and zipper are reinforced. The front of the legs down to the boots, and around the boots are also protected from abrasion and puncturing.
Seam Type	Stitched and Taped
Available Sizes	M, L, XL, XXL
Standards Overview	<ul style="list-style-type: none">• EN 14225-2:2017• HZ chemical approval• BIO micro-organism approval

Suit Components & Accessories

Suit Components and Accessories	
Design Features	Rear entry. The suit material is heavy duty, built to withstand the rigours of diving in a harsh working environment. Whether the job is cleaning a ships hull, carrying out welding and inspection, or clearing a fouled propeller, the VIKING™ HD is equal to these tasks and more.
Yoke Options	A full range of rubber helmet yokes is available to fit all of the popular demand and freeflow helmets such as SL27/37/47 etc, AH3/5, Desco, Deepsea and Genesis.
Neck Seal	Fitted with a Surveyor latex neck seal as standard. Option: VIKING™ Quick Neck system, which allows for quick changing of broken seals.
Cuffs	Latex HD cuffs are the standard fitment. Options: A rubber cuff ring system or the VIKING™ Bayonet Ring System. Both systems make the fitment of rubber gloves and mittens possible.
Footwear And Attachments	The standard boot is an extension of the leg, with a heavy duty flexible rubber outsole stitched and taped to the end. The outsole features a non-slip surface for grip. The heel has a fin strap retainer. Alternative options are available.
Zipper	Red/Black suits: Heavy Duty (HD) magnetic; 90 cm long. Black suits: Heavy Duty (HD) non-magnetic; 90 cm long, The zipper is gas and watertight, and is placed across the shoulders.
Included With Each Delivery	Each suit comes supplied with suspenders, carry bag, user manual, repair kit and zip care materials.

For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444

Australia

Ansell Limited
T: +61 1800 337 041

Asia Pacific Region

Ansell Global Trading Center
T: +603 8310 6688

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

