


## Robust, extended-cuff hand protection for food processing and heavy-duty jobs

- **Strong protection:** TouchNTuff® 92-665 nitrile gloves reliably protect in the event of accidental exposure to chemicals
- **Comfort and durability:** The soft yet tough nitrile offers a comfortable feel while resisting rips and tears
- **Longer length:** An extended cuff enhances protection over the wrist and forearm
- **Secure grip:** Textured fingertips help wearers confidently grip objects and tools
- **Ideal for food applications:** These gloves are compliant with food handling requirements

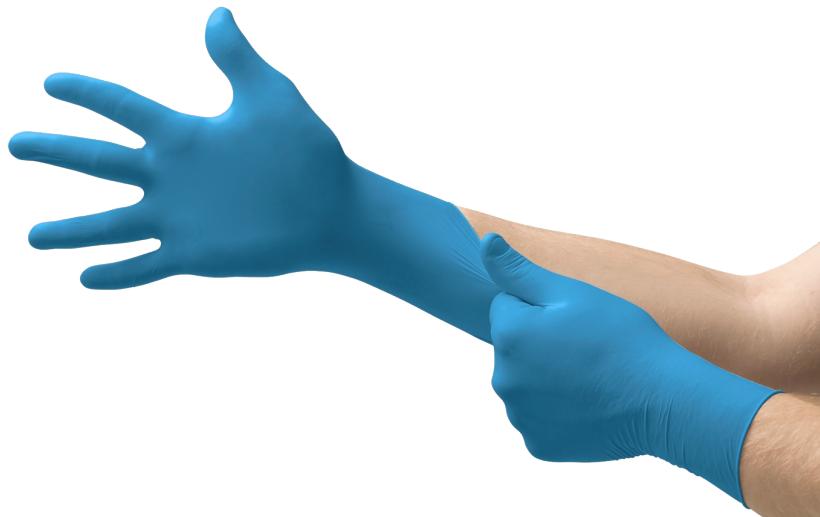

### Industries

- Life Sciences
- Chemical
- Food Processing

### Recommended For

- Transferring liquids and solids
- Sample taking and processing
- Handling incoming goods
- Maintenance
- All food processing, applications that have food contact

# TECHNICAL DATA SHEET

Product Information	
<b>Material</b>	Nitrile
<b>External Glove Surface</b>	Textured Fingers
<b>Audit Standards</b>	ISO 9001
<b>Product Certification</b>	ASTM D6319, Category III, EN ISO 21420:2020, EN ISO 374-1:2016 Type B JKT, EN ISO 374-5:2016 Virus, FDA21 CFR 177-2600-US Food Contact Approved, EU Food Contact Approved, ISO 9001, UKCA
<b>Packaging Overview</b>	100 gloves per dispenser 10 dispensers per case 1000 gloves per case
<b>Storage Instructions</b>	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
<b>Country Of Origin</b>	Thailand
<b>Product Segmentation</b>	High Risk
<b>Antistatic</b>	Yes EN1149
<b>Silicone Free</b>	Yes
<b>Vulcanization Chemical Accelerators</b>	<ul style="list-style-type: none"> <li>Zinc Dibutyldithiocarbamate (ZDBC)</li> </ul> <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

## PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	300 / 12		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.11 / 4.3		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.14 / 5.5		ASTM D3767,EN 420
	BEFORE AGING		AFTER AGING
Ultimate Tensile Strength (MPa)	≥ 14	≥ 14	ASTM D412 & D573
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	≥ 6	≥ 6	EN 455-2

## ORDERING INFORMATION

Size	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)
Product Code	92665080	92665090	92665100

## Performance Standards and Regulatory Compliance



For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

**Europe, Middle East & Africa Region**  
Ansell Healthcare Europe NV

T: +32 (0) 2 528 74 00  
F: +32 (0) 2 528 74 01

**Asia Pacific Region**  
MY: +603 8310 6688  
apac.medical@ansell.com  
CN: +86 21 38275000  
infochina@ansell.com  
JP: +813 5549 8151  
info.medical.jp@ansell.com

**North America Region**  
Ansell Healthcare Products LLC

T: +1 800 800 0444  
F: +1 800 800 0445

**Latin America & Caribbean Region**  
BR: +55 (11) 3356-3100  
latam.medical@ansell.com  
MX: +52 442 296 2050  
latam.medical@ansell.com  
CO: +57 1 288 3247  
latam.medical@ansell.com

**Australia**

Ansell Limited  
T: +61 1800 337 041  
F: +61 1800 803 578

**Russia**

Ansell PYC  
Ten: +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

