


Extra long gloves offering reliable performance and chemical splash protection

- **Extended protection:** These long 355mm gloves provide extra forearm protection
- **Comfort and durability:** Strong, comfortable nitrile material resists tearing and protects in the event of chemical splashes
- **Easy donning:** An extra wash during manufacturing makes these gloves ultra-smooth for easier donning, doffing and double gloving
- **Reduced allergy risk:** Manufactured without accelerators, helping to protect users from Type IV skin allergies
- **Secure grip:** Fully textured design enhances grip in laboratory, food-processing and other applications
- **Smart packaging:** Packaged in polybags to minimize contamination risks

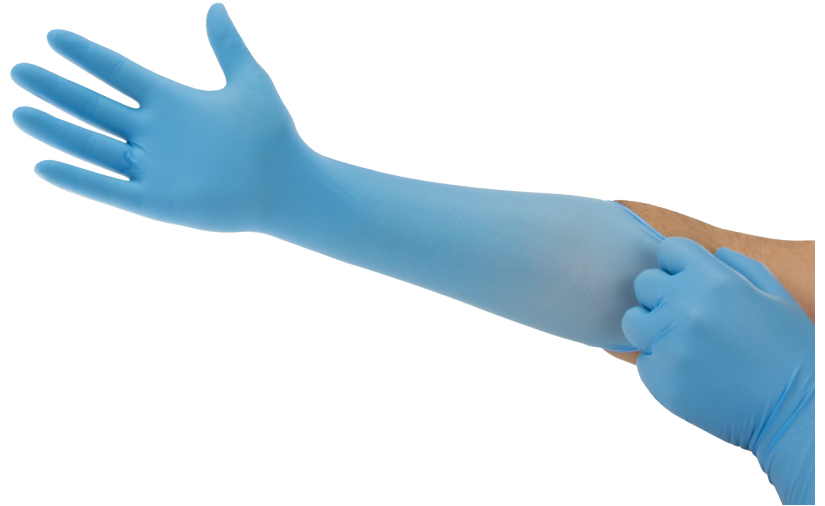

Industries

- Electronics
- Food Processing
- Industrial
- Janitorial / Sanitation
- Life Sciences
- Manufacturing
- Recycling and Waste Disposal

Recommended For

- Blending, compounding materials
- Food processing and handling
- Handling of tools
- Handling of paint/glue guns and sprayers
- Laboratory analysis
- Maintenance and equipment clean up
- Chemical Handling

TECHNICAL DATA SHEET

| Product Information | |
|--|--|
| Material | Nitrile |
| External Glove Surface | Fully Textured |
| Audit Standards | ISO 13485, ISO 9001 |
| Product Certification | ASTM D6319, ASTM D412, ASTM D6124, Category III, EU Food Contact Approved, EC 2023/2006, EN ISO 21420:2020, EN ISO 374-1:2016 JKT, EN ISO 374-5:2016, EN 421:2010, FDA21 CFR 177-2600-US Food Contact Approved, ISO 13485, ISO 9001 |
| Packaging Overview | 50 gloves per polybag 10 polybags per case 500 gloves per case |
| Storage Instructions | Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition. |
| Country Of Origin | Malaysia |
| Product Segmentation | High Risk |
| Antistatic | Yes EN1149 |
| Silicone Free | Yes |
| Vulcanization Chemical Accelerators | <ul style="list-style-type: none"> Made without accelerators <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p> |


PHYSICAL PROPERTIES

| | Typical Values | | Testing Method |
|---|---------------------|--------------------|----------------------|
| Length (mm/inches) | 355 / 14 | | ASTM D3767, EN 420 |
| Freedom from Holes (Inspection level I) | 1.5 AQL | | ASTM D5151, EN 455-1 |
| Palm Thickness (mm/mils) | 0.17 / 6.7 | | ASTM D3767, EN 420 |
| Finger Thickness (mm/mils) | 0.20 / 7.9 | | ASTM D3767, EN 420 |
| | BEFORE AGING | AFTER AGING | |
| Ultimate Tensile Strength (MPa) | ≥14 | ≥ 14 | ASTM D412 & D573 |
| Elongation at Break (%) | ≥ 500 | ≥ 400 | ASTM D412 |
| Force at break (N) | ≥ 6 | ≥ 6 | EN 455-2 |

ORDERING INFORMATION

| Size | S (6.5 - 7) | M (7.5 - 8) | L (8.5 - 9) | XL (9.5 - 10) | XXL (10.5 - 11) |
|---------------------|-------------|-------------|-------------|---------------|-----------------|
| Product Code | 93263070 | 93263080 | 93263090 | 93263100 | 93263110 |

Performance Standards and Regulatory Compliance



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

MY +603 8310 6688
apac.medical@ansell.com
CN: +86 21 38275000
infochina@ansell.com
JP: +813 5549 8151
info.medical.jp@ansell.com

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

BR +55 (11) 3356-3100
latam.medical@ansell.com
MX: +52 442 296 2050
latam.medical@ansell.com
CO: +57 1 288 3247
latam.medical@ansell.com

Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia

Ansell PYC
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending; www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

