

Fully encapsulated protective suit resistant to chemicals and biological hazards.

- **Specialized protection:** The AlphaTec™ 5000 Ultrasonically Welded & Taped - Model 186-G02 is a liquid-tight, fully encapsulated chemical-protective suit, resistant to various chemicals*, biological hazards and chemical warfare agents
- **Improved visibility:** An orange outer surface ensures this protective suit is highly visible, reducing workplace injuries
- **Heightened defenses:** Fully encapsulated, with a PVC multi-layer visor, it also features ultrasonically welded and taped seams, for outstanding barrier protection against liquids and particulates
- **Enhanced features:** In addition, it boasts a side-entry dual-zip system, a rear-mounted breathing apparatus (BA) pouch, and attached socks with static-dissipative soles and boot overflaps, as well as attached Ansell barrier gloves with no-drip cuffs
- **Increased ventilation:** In addition, it features rear-positioned exhalation valves and a bat wing design, which enables wearers to check the air gauge from within
- **Certified antistatic capabilities:** This full body protection suit also satisfies EN 1149-5 antistatic standards

**CE Category III Type 3/4/5 protection*



Industries

- Life Sciences
- Mining
- Fire and Rescue
- Energy
- Automotive Aftermarket
- Emergency Medical Services
- Food Processing

Applications

- Transferring liquids and solids
- Unexpected leakages spills or other releases
- Opening and draining pumps valves or lines
- Raw material sample collection
- Hazmat response
- Filling, blending and charging of raw materials
- Contaminated Environments
- Concentration mixing and palletisation
- Assembly and disassembly of large pipes
- Chemical Handling

KEY FEATURES & BENEFITS


- ◊ **Permeation barrier:** Resists chemicals and biohazards*
- ◊ **Highly visible orange color:** For better worker and workplace safety
- ◊ **Taped and welded seams:** Enhanced particulate and liquid resistance

**>480-minute breakthrough time against 14 of the 15 chemicals listed in EN ISO 6529*


Technology



Material Diagram

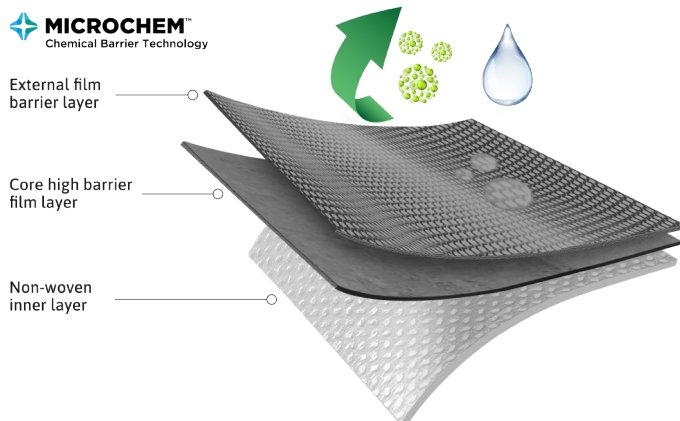

Seam Diagram

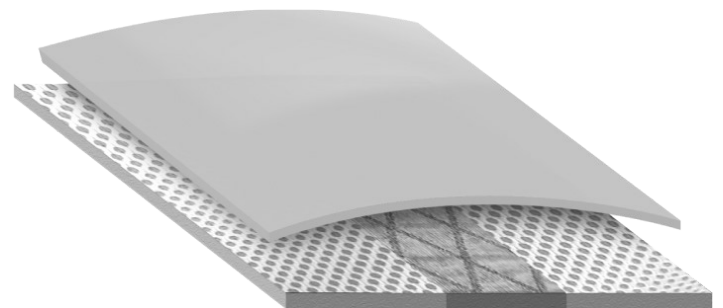

Performance Standards



Product Information

Product Information	
Available Sizes	M, L, XL, 2XL, 3XL
Color	Orange
Packaging Overview	Individually Packed
Product Material	Multi-layer non-woven barrier Laminate fabric
Product Reference	5000 APOLLO - Model 186-G02
Standards Overview	CE CATEGORY III (Type 3-B, Type 4-B, EN 14126, EN 1149-5)
Seam Type	Welded and Taped
Shelf Life	5 years
Style Number	O50T186B

Suit components & accessories

Suit Components and Accessories	
Design Features	Side entry Double Zip flap, expanded back for internal wearing of self-contained breathing apparatus, rear positioned exhalation valves.;Attached socks with static dissipative sole & leg overflap, attached Ansell Barrier Gloves with sleeve overflap, semi-rigid multi-layer visor and ultrasonically welded and taped seams.

For additional in formation visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region
Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00

North America Region
Ansell Healthcare Products LLC
T: +1 800 800 0444

Australia
Ansell Limited
T: +61 1800 337 041

Asia Pacific Region
Ansell Global Trading Center
T: +603 8310 6688

Latin America & Caribbean Region
Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.