


MICROFLEX™

63-293

Thick, Durable Latex Exam Glove with Extended Cuff

Extra-thick disposable latex gloves, offering durable protection for heavy-duty applications

- **Extra defense:** MICROFLEX™ 63-293 latex gloves are 3x thicker than standard disposable latex gloves, ensuring greater resistance against snags and tears
- **Comfortable fit:** These thick latex gloves' soft, elastic formulation delivers comfort and flexibility
- **Added protection:** With an extended cuff, these gloves offer workers enhanced forearm and wrist protection
- **Enhanced grip:** MICROFLEX™ 63-293 gloves' textured fingertips enhance grip performance
- **Easy donning:** Donning is made easy thanks to the gloves' double-chlorinated design

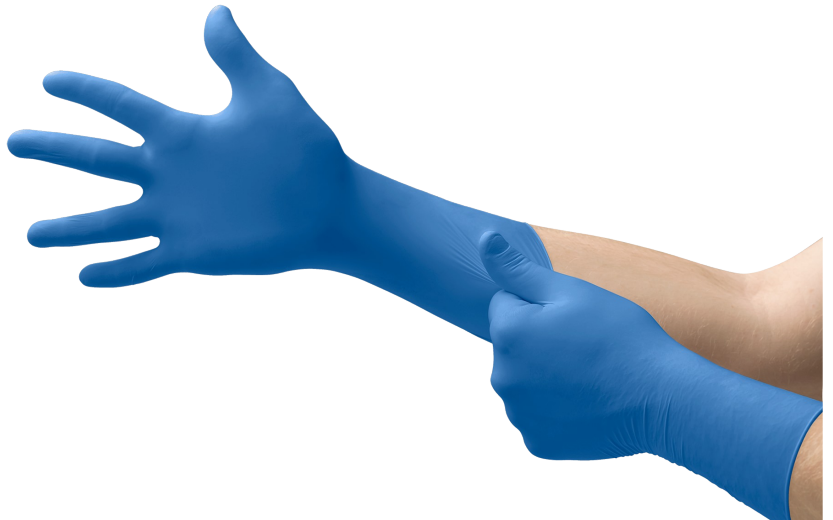

*CAUTION: This product contains natural rubber latex, which may cause allergic reactions

Industries

- Automotive
- Automotive Aftermarket
- Life Sciences
- Healthcare

Recommended For

- General Purpose Auto Aftermarket
- Tire rotation & changes
- Sample taking and processing
- Raw material sample collection
- Maintaining lab furniture and equipment
- Inspection, selecting, checking parts
- Assembly and inspection of components
- Picking and fastening components
- Equipment repair and maintenance
- Body panel repair and replacement
- Animal care feeding and cleanup
- Extra protection over the wrist and arm

TECHNICAL DATA SHEET

	Product Information
Material	Natural Rubber Latex
External Glove Surface	Textured Fingers
Audit Standards	EN ISO 13485:2012
Product Certification	EN ISO 374-1:2016 Type B KPT, EN 374:2003 Low Chemical Resistant, EN ISO 374-5:2016 Virus, EN 374:2003 Microorganism, Category III, EN 420:2003 + A1:2009, European Directive 89/686/EEC, EC 2023/2006, EU Food Contact Approved, EN 421:2010 Radioactive Contamination, EN ISO 21420:2020
Packaging Overview	50 gloves per dispenser 10 dispensers per case 500 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Product Segmentation	High Risk
Antistatic	Not Tested
Silicone Free	No

PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	295 / 11.6		ASTM D3767, EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151, EN 455-1
Palm Thickness (mm/mils)	0.28/11		ASTM D3767, EN 420
Finger Thickness (mm/mils)	0.36/14.2		ASTM D3767, EN 420
	BEFORE AGING	AFTER AGING	
Elongation at Break (%)	≥ 850	≥ 750	ASTM D412
Force at break (N)	≥ 15	≥ 10	EN 455-2

ORDERING INFORMATION

Size	S (6.5 – 7)	M (7.5 – 8)	L (8.5 – 9)	XL (9.5 – 10)
Product Code	63293070	63293080	63293090	63293100

Performance Standards and Regulatory Compliance

EN ISO 374-1:2016
Type B


K P T



EN 374



EN 421



EN ISO 374-5


VIRUS

EN 374



For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region
Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01
Asia Pacific Region
MY: +603 8310 6688
apac.medical@ansell.com
CN: +86 21 38275000
infochina@ansell.com
JP: +813 5549 8151
info.medical.jp@ansell.com

North America Region
Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445
Latin America & Caribbean Region
BR: +55 (11) 3356-3100
latam.medical@ansell.com
MX: +52 442 296 2050
latam.medical@ansell.com
CO: +57 1 288 3247
latam.medical@ansell.com

Australia
Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578
Russia
Ansell PYC
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2025 Ansell Limited. All Rights Reserved.
Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.

