

## 66-677 Coverall

Flame Retardant, Arc resistant and breathable chemical splash resistance, re-usable Level B protection

**NFPA 1992 compliant,  
combining outstanding  
comfort and durability with  
liquid chemical splash, flame  
and arc resistance..**



## Industries

- Food Processing
- Mining
- Maintenance
- Automotive


## Applications

- Plant disinfection and sanitization
- Chemical Handling
- Repair and maintenance
- Oil Platforms
- Mining
- Metal Plating
- Food Processing
- Sanitation
- Utilities
- Energy
- Water plants
- Pulp and Paper Production
- Potential Flash Fire

## KEY FEATURES & BENEFITS

- Chemical splash fabric provides protection with penetration data for more than 70 chemicals
- Nomex® fabric provides heat and flame resistance as well as arc flash protection to HRC level 2
- Breathable fabric maximizes comfort, reducing the risk of heat stress and increasing productivity
- Sealed seams and double front storm flap ensure the whole garment offers leak-tight protection from chemical spray
- Durable laminated fabric system is machine washable for longer, cost-effective service life
- Certified according to NFPA 1992 (Edition 2012) – Liquid Splash-Protective Clothing for Hazardous Materials Emergencies

## Seam Diagram

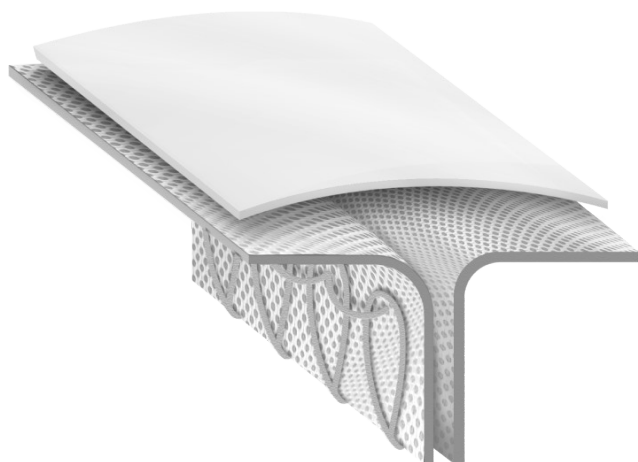

## Performance Standards



ASTM F1671



EN 1149-5

## Product Information

Product Information	
Available Sizes	S, M, L, XL, 2XL, 3XL, 4XL, 5XL, 6XL, 7XL
Color	Blue
Packaging Overview	<ul style="list-style-type: none"><li>5 Per Case</li></ul>
Product Material	White Nomex® inner with breathable membrane and Blue Nomex® outer
Product Reference	66-677 Coverall
Standards Overview	<ul style="list-style-type: none"><li>• Certified according to NFPA 1992 - Liquid splash-protective clothing for hazardous materials emergencies</li><li>• PyroMan™ tested at North Carolina State University (USA) - A full-scale test method for testing flammability and thermal protection of garments at a test temperature of 700-1200° C - with 0% body burn after 2sec flash fire exposure, and less than 8% with no 3rd degree burns after 3sec flash fire exposure. Instead of testing the survivability of the suit, PyroMan tests the survivability of the wearer.</li><li>• Tested according to ASTM F2302-08 - Standard Performance Specification for Heat and Flame Resistant Clothing</li><li>• Meets NFPA 70E - Standard for Electrical Safety in the Workplace, Hazard Risk Category (HRC) 2</li><li>• Tested according to ASTM F 1891-02/ASTM 1959-04 - Standard Test Method for Determining Arc Thermal Performance of Textile Materials for Clothing - with Arc rating 9.0 cal/cm2</li></ul>
Seam Type	Stitched and Taped
Shelf Life	5 years

Suit components & accessories

Suit Components and Accessories	
Design Features	AlphaTec® workwear is made of a unique breathable membrane from Gore that helps manage heat stress, while offering exceptional liquid chemical splash protection, enabling the wearer protection, as well as comfort throughout a full shift. Design features include: • Raglan sleeves, designed for comfortable arm movement • Adjustable hook and loop closure straps at the wrist, ankle and front flap for a snug fit • Double front flap for secured closure • Front tab to clip a microphone or other devices • Optional detachable hood (66-674) which is attached to the collar by means of a Velcro hook and loop

For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

**Europe, Middle East & Africa Region**  
Ansell Healthcare Europe NV  
T: +32 (0) 2 528 74 00

**North America Region**  
Ansell Healthcare Products LLC  
T: +1 800 800 0444

**Australia**  
Ansell Limited  
T: +61 1800 337 041

**Asia Pacific Region**  
Ansell Global Trading Center  
T: +603 8310 6688

**Latin America & Caribbean Region**  
Ansell Commercial Mexico S.A. de C.V.  
T: +52 442 248 1544 / 248 3133

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: [www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.